

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 11401 (Part 1) (1985, Reaffirmed 2007): General Requirements for Slow Sand Filters, Part 1: General Guidelines. UDC 628.16.067.1



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam



“Knowledge is such a treasure which cannot be stolen”

(Reaffirmed 2007)
IS : 11401 (Part 1) - 1985

(Reaffirmed 2002)

Indian Standard
**REQUIREMENTS FOR
SLOW SAND FILTERS
PART 1 GENERAL GUIDELINES**

UDC 628.16.067.1



© Copyright 1986

INDIAN STANDARDS INSTITUTION
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

*Indian Standard*REQUIREMENTS FOR
SLOW SAND FILTERS

PART 1 GENERAL GUIDELINES

Public Health Engineering Equipment Sectional Committee, BDC 40

Chairman

DR B. B. SUNDARESAN

Representing

University of Madras, Madras

Members

ADVISER (PHE)	Ministry of Works & Housing, New Delhi
ASSISTANT ADVISER (PHE) (<i>Alternate</i>)	
SHRI I. CHANDRA	Public Health Engineering Department, Government of Haryana, Chandigarh
SHRI R. C. P. CHAUDHARY	Engineers India Limited, New Delhi
CHIEF ENGINEER (GENERAL)	Tamil Nadu Water Supply & Drainage Board, Madras
SHRI S. A. JAGDESAN (<i>Alternate</i>)	
SHRI D. K. CHOUDHARY	Geo-Miller & Company, Calcutta
SHRI N. MANIVANNAN (<i>Alternate</i>)	
SHRI S. K. DASGUPTA	Calcutta Metropolitan Development Authority, Calcutta
SHRI S. J. DUTTA (<i>Alternate</i>)	
DR ALOKE DE	Jadavpur University, Calcutta
DEPUTY MUNICIPAL COMMISSIONER	Municipal Corporation of Greater Bombay,
(SPECIAL ENGINEERING)	Bombay
HYDRAULIC ENGINEER (<i>Alternate I</i>)	
CHIEF ENGINEER (SEWERAGE) (<i>Alternate II</i>)	
ENGINEER-IN-CHIEF	Municipal Corporation of Delhi, Delhi
DR T. K. GEORGE	College of Engineering, Trivandrum
SHRI R. A. KHANNA	Public Health Engineering Department, Government of Madhya Pradesh, Bhopal
SHRI D. K. MITRA (<i>Alternate I</i>)	
SHRI I. S. BAWEJA (<i>Alternate II</i>)	
SHRI M. Y. MADAN	The Hindustan Construction Company Limited, Bombay
SHRI P. S. WADIA (<i>Alternate</i>)	
SHRI S. L. MAINI	Public Health Engineering Department, Government of Punjab, Patiala

(Continued on page 2)

© Copyright 1986

INDIAN STANDARDS INSTITUTION

This publication is protected under the *Indian Copyright Act* (XIV of 1957) and reproduction in whole or in part by any means except with written permission of the publisher shall be deemed to be an infringement of copyright under the said Act.

IS : 11401 (Part 1) - 1985

(Continued from page 1)

<i>Members</i>	<i>Representing</i>
SHRI A. R. MIR	Public Health Engineering Department, Government of Jammu and Kashmir, Srinagar
SHRI G. M. KANTH (<i>Alternate</i>)	
SHRI Y. N. NANJUNDIA	Health and Family Welfare Department, Gandhinagar
PROF K. J. NATH	All India Institute of Hygiene & Public Health, Calcutta
SHRI D. GUIN (<i>Alternate</i>)	
SHRI R. NATARAJAN	Hindustan Dorr-Oliver Limited, Bombay
SHRI SUBHASH VERMA (<i>Alternate</i>)	
SHRI K. PRABHAKAR RAI	Ministry of Defence (Engineer-in-Chief's Branch), Army Headquarters
LT-COL M. P. THOMAS (<i>Alternate</i>)	
REPRESENTATIVE	Hydraulic & General Engineers Private Limited, Bombay
REPRESENTATIVE	Indian Institute of Technology, Kanpur
DR A. V. S. PRABHAKARA RAO (<i>Alternate</i>)	
REPRESENTATIVE	Uttar Pradesh Jal Nigam, Lucknow
SHRI A. N. RAO	Directorate General of Technical Development, New Delhi
SHRI K. P. DOHARE (<i>Alternate</i>)	
SHRI KISHORE K. SANGHANI	Ahmedabad Municipal Corporation, Ahmadabad
SHRI A. SELVARAJ	Public Health Engineering Department, Government of Karnataka, Bangalore
SHRI A. K. SETH	National Environmental Engineering Research Institute (CSIR), Nagpur
SHRI R. PARAMASIVAM (<i>Alternate</i>)	
DR B. SUBBA RAO	Walchand College of Engineering, Sangli
SHRI S. A. SWAMY	The Institution of Engineers (India), Calcutta
SHRI P. S. TENDOLKAR	Candy Filters (India) Limited, Bombay
SHRI S. L. SASTRI (<i>Alternate</i>)	
SHRI V. VARADARAJAN	Madras Metropolitan Water Supply & Sewerage Board, Madras
SHRI S. DAIVAMANI (<i>Alternate</i>)	
SHRI G. RAMAN, Director (Civ Engg)	Director General, ISI (<i>Ex-officio Member</i>)
	<i>Secretary</i>
	SHRI A. K. AVASTHY Deputy Director (Civ Engg), ISI

Water Treatment Equipment Subcommittee, BDC 40 : 1

<i>Convener</i>	
SHRI JAI NARAIN	Indian Water Works Association (Delhi Centre), New Delhi
<i>Members</i>	
SHRI K. R. SAHU (<i>Alternate to</i> Shri Jai Narain)	
DR A. G. BHOLE	Visvesvarya Regional College of Engineering, Nagpur
DR S. M. DHABADGAONKAR (<i>Alternate</i>)	

(Continued on page 8)

Indian Standard

REQUIREMENTS FOR SLOW SAND FILTERS

PART 1 GENERAL GUIDELINES

0. FOREWORD

0.1 This Indian Standard (Part 1) was adopted by the Indian Standards Institution on 30 August 1985, after the draft finalized by the Public Health Engineering Equipment Sectional Committee had been approved by the Civil Engineering Division Council.

0.2 A safe and convenient water supply is a paramount importance to human health and well being of a society as a whole. Although the field of water treatment offers a variety of technological choices, only a few of them fully meet the specific requirement of rural areas. One such method is slow sand filtration — a simple, efficient and reliable technique for the treatment of water. In the construction of the plant, locally available material is generally used and the skills for construction, operation and maintenance are usually available locally or easily acquired. This standard is intended to give guidance for the application of slow sand filtration for biological purification of surface water polluted by human or animal excreta. Ground water treatment by means of slow sand filtration is not covered in the standard.

0.3 In formulating this standard assistance has been derived from the following:

- a) L. Huisman and W. E. Wood: Slow Sand Filtration, 1974. World Health Organization, Geneva.
- b) Technical paper No. 11. December 1978 WHO International Reference Centre for Community Supply and Sanitation. World Health Organization, Geneva.

0.4 For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS : 2-1960*. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

*Rules for rounding off numerical values (*revised*).

1. SCOPE

1.1 This standard (Part 1) covers general principle, performance, applicability and limitations of slow sand filters for water treatment.

2. DESCRIPTION OF BASIC ELEMENTS

2.1 Basically, a slow sand filtration unit consists of a water tight box, containing a supernatant raw water layer, a bed of filter medium, a system of underdrains and a set of filter regulation and control devices. A typical illustration of basic elements of slow sand filter is given in Fig. 1.

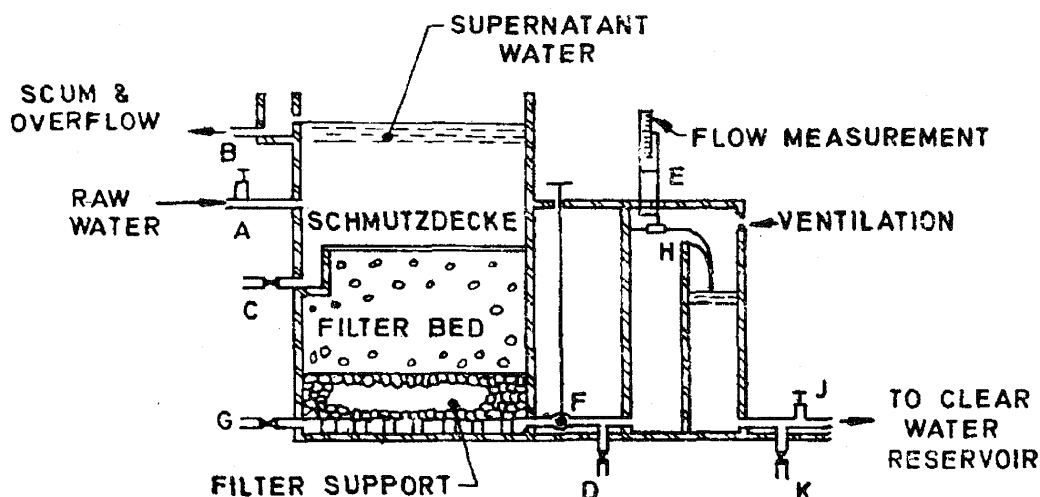


FIG. 1 BASIC ELEMENTS OF A SLOW SAND FILTER

2.1.1 *Supernatant Water Layer* — The supernatant water layer provides the driving force for raw water to pass through the bed of filter medium and creates a detention time of several hours for the raw water to be treated, during which period particle may settle and/or agglomerate or be subjected to other physical or (bio) chemical processes.

2.1.2 *Bed of Filter Medium* — In principle, the filter medium may consist of any porous, stable material. But in domestic water supply practice granular sand which is widely available in nature, inert, cheap and durable is commonly used. The sand should be free from clay, loam and organic matter.

2.1.3 *Underdrain System* — The underdrain system serves two purposes; it provides an unobstructed passage for the filtered water and supports the bed of filter medium. It usually consists of a main and lateral drains made of perforated or non-jointed pipes, concrete blocks, or well-burnt bricks. The underdrains are covered by layers of graded

gravel. The gravel laid with large sized pieces at the bottom and progressively reducing in size to the top, prevents sand grains from entering into the drainage system.

2.1.4 Filter Regulation and Control Devices — The important filter regulation and control devices are listed below (*see* Fig. 1).

A — Raw water delivery valve with or without a level control mechanism.

B — Device for drainage of overflow and scum.

C — Valve for drainage of supernatant water prior to filter cleaning.

D — Valve for drainage of water from filter bed.

E — Calibrated flow measuring device for filtered water.

F — Filtered water outlet valve for regulation the filtration rate.

G — Interconnection valve for backfilling with clean water after filter cleaning.

H — Outlet weir with its sill located slightly above the maximum level of sand in the filter bed. This weir prevents the occurrence of negative head in the filter and by allowing a free fall facilitates the operation of filters independent of fluctuations of water level in clear water reservoir. The weir also helps to increase the dissolved oxygen content of filtered water.

J — Delivery of treated water to the clear water storage reservoir.

K — Delivery of water to waste.

3. PRINCIPLE OF PURIFICATION OF WATER

3.0 During the passage of raw water through the bed of filter medium the water quality improves considerably by reduction in the number of micro-organism (bacteria-viruses, cysts, etc) by removal of suspended and colloidal material and by changes in its chemical composition. A newly commissioned filter is run for a few weeks to mature when a thin, sticky layer called the 'Schmutzdecke' is formed on the filter bed and around the sand grains in the bed. The surface layer of Schmutzdecke consists of a variety of biologically active micro-organisms which breakdown organic matter and convert it into simple, harmless substances. A great deal of suspended inorganic matter is retained in the bed and a clear, safe water is produced.

3.1 Process of Purification — The purification starts in the supernatant raw water layer where large particles will settle into the

filter bed and smaller particles may agglomerate to settleable flocs due to physical or bio (chemical) interactions. Under the influence of sunlight, algae will grow, producing oxygen which helps the biological processes. The number of bacteria will decrease and there will be reduction of organic matter due to bio-chemical oxidation.

Major part of the removal of impurities and considerable improvement of the physical, chemical and bacteriological quality of raw water takes place in the filter bed and especially in the Schmutzdecke. In this top layer abound micro-organisms such as algae, plankton, diatoms and bacteria, which through their tremendous biological activity, break down organic matter.

As the water passes through the bed it is constantly changing direction so that particles carried by the water come into contact with the filter grains by various transport mechanisms. The grains become covered with a sticky layer of mainly organic material which in turn absorbs these particles by various attachment mechanisms. At the same time the active micro-organisms (bacteria, protozoa, bacteriophages) in the sticky layer around the grain feed on the impurities caught as well as on each other. In this way, degradable organic matter, including bacteria and viruses of faecal origin, is gradually broken down and converted into water, carbon dioxide and harmless inorganic salts. The life-filled zone where these purification mechanisms takes place extends to about 0.4-0.5 m down from the surface of the filter bed, but it gradually decreases in activity downwards as the water is purified and contains less organic matter and nutrients. At greater depth in the filter bed the products of the biological processes are further removed by physical processes (adsorption) and chemical action (oxidation).

3.2 The transport, attachment and purification mechanisms described will only function effectively if a sufficient detention time in the filter bed is allowed for the water to be treated. Especially, when slow sand filtration is the main treatment processes, the rate of filtration should be kept low (0.1 and 0.2 m/h) or 0.1-0.2 m³/m² bed area per hour. Another important parameter for the purification process is the oxygen content of water. The activity of the biomass will decrease considerably if the oxygen content of water into the filter medium falls below 0.5 mg/l. If the anaerobic conditions occur, obnoxious impurities may be released to the water by the biomass. Such occurrences may be prevented by aeration of the raw water pre-sedimentation of the raw water or recycling part of the aerated effluent to the supernatant water reservoir. For additional aeration of filtered water, the outlet weir chamber should be provided with suitable ventilation.

4. PERFORMANCE OF SLOW SAND FILTER

4.1 The effect of the purification process on water quality depends on many factors, such as raw water quality, rate of filtration, grain size of the filter medium, the temperature and oxygen content of the water. For normal operational conditions, the average performance of slow sand filters with regard to the removal of certain impurities is given in Table 1.

TABLE 1 PERFORMANCE OF SLOW SAND FILTERS

PARAMETER	PURIFICATION EFFECT
Organic matter	Slow sand filters produce a clear effluent, virtually free from organic matter
Bacteria	Between 99 and 99.99 percent of the pathogenic bacteria may be removed; cercariae of schistosoma, cysts and ova are removed to an even higher degree; E. Coli are reduced by 99.99.9 percent
Viruses	In a mature slow sand filter, viruses are virtually completely removed
Colour	Colour is significantly reduced
Turbidity	Raw water turbidities of 100-200 NTU can be tolerated for a few days only; a turbidity more than 50 NTU is acceptable only for a few weeks; preferably 10 NTU; for a properly designed and operated filter the effluent turbidity will be less than 1 NTU.

5. APPLICABILITY AND LIMITATION OF SLOW SAND FILTERS

5.1 Slow sand filtration is an efficient method for removal of organic matter and pathogenic organisms. It is, therefore, a particularly appropriate treatment method for surface waters containing objectionable quantities of such impurities. If raw water contains high content of suspended matter (inorganic turbidity), pre-treatment unit should be installed to prevent rapid clogging of the filter.

5.2 Slow sand filters require relatively large area and a large quantity of filter medium. They are usually cleaned by manual labour. They are cost effective for small and medium communities up to about 8.0 MLD plant capacity where cost of land and labour is relatively inexpensive.

5.3 Sudden changes in raw water quality and freezing weather conditions may temporarily upset the performance of biological filters. Presence of algae may improve the quality of Schmutzdecke, but too high an algae content of certain species may result in rapid clogging and short filter runs. Because of their simplicity in construction, operation and maintenance, they are ideally suited for rural water supplies and where skilled labour and supervision are difficult to provide.

IS : 11401 (Part 1) - 1985

(Continued from page 2)

<i>Members</i>	<i>Representing</i>
SHRI S. N. CHAKRABARTY	Engineers India Limited, New Delhi
SHRI D. K. CHOUDHURY	Geo-Miller & Company Private Limited, Calcutta
SHRI A. K. MAZUMDER (<i>Alternate</i>)	
SHRI M. M. DATTA	Central Public Health & Environmental Engineering Organization, New Delhi
SHRI D. D. DESAI	Pennwalt India Limited, Bombay
SHRI V. P. THANGAMUTHU (<i>Alternate</i>)	
SHRI K. GOVINDAN NAIR (URBAN)	Public Health Engineering Department, Government of Kerala, Trivandrum
SHRI R. NATARAJAN	Hindustan Dorr-Oliver Limited, Bombay
SHRI SUBHASH VERMA (<i>Alternate</i>)	
SHRI R. PARMASIVAM	National Environmental Engineering Research Institute (CSIR), Nagpur
SHRI N. G. SWARNAKAR (<i>Alternate</i>)	
SHRI N. RAMACHANDRAN	Ion Exchange (India) Limited, Bombay
SHRI A. M. JOSHI (<i>Alternate</i>)	
SHRI C. E. S. RAO	The Hindustan Construction Company Limited, Bombay
REPRESENTATIVE	Municipal Corporation of Greater Bombay, Bombay
REPRESENTATIVE	All India Institute of Hygiene & Public Health, Calcutta
REPRESENTATIVE	Hydraulic & General Engineer (Private) Limited, Bombay
SHRI C. L. SASTRI	Candy Filters (India) Limited, Bombay
SHRI V. SATYAMURTHI	EIMCO — KCP Limited, Madras
SHRI T. SUBRAHMANYAM (<i>Alternate</i>)	

